


# VGRD

- Vite a colletto con distanziale rettificato  
 - Shouldered screw with ground spacer

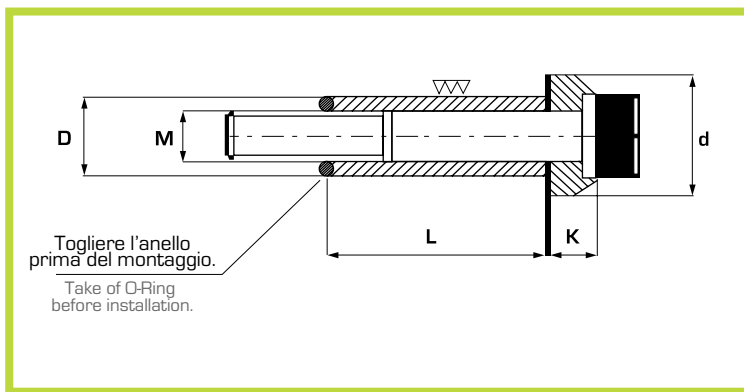

**Vite:** classe 12.9 UNI 5931  
**Screw:** steel type 12.9 UNI 5931  
**Tolleranze di rettifica:** D= h7  
**Tolerance of grounding:** D= h7

Esempio di ordinativo: VGRD MxL  
 Example of purchasing order: VGRD MxL

K	6	6,5	7,5	9	11
d	15	19	23	27	34
D	10	12,5	15	17,5	23
filetto thread M	6MA	8MA	10MA	12MA	16MA
L					
15	•				
20	•	•	•		
25	•	•	•		
30	•	•	•	•	
35	•	•	•	•	
40	•	•	•	•	•
45	•	•	•	•	•
50	•	•	•	•	•
55	•	•	•	•	•
60	•	•	•	•	•
65	•	•	•	•	•
70	•	•	•	•	•
80	•	•	•	•	•
90	•	•	•	•	•
100	•	•	•	•	•
110	•	•	•	•	•
120		•	•	•	•
140		•	•	•	•
150			•	•	•
160			•	•	•
180			•	•	•
200			•	•	•
220				•	•
230					•