


## R0633 Anello a staffa orientabile Anchor point

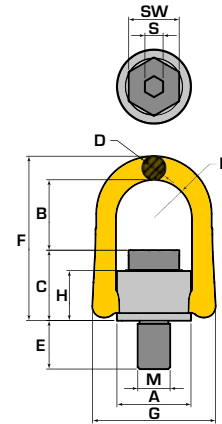

Descrizione:

Description:


Cod.	Limite di Carico Working Load Limit (t*)		Filettatura Thread	Mom. torcen. Torque (Nm)	N.W. (kg)	Dimensioni Dimension (mm)										
	5:1	4:1				A	B	C	D	E	F	G	H	R	S	SW
R0633-01-0001	0.56	0.7	M10 x 1.5	60	0.3	33	41	29	11	15	80	58	23	17	6	17
R0633-01-0002	0.8	1	M12 x 1.75	100	0.3	33	40	31	11	20	80	58	23	17	8	19
R0633-01-0003	1.6	2	M16 x 2	150	0.9	50	54	46	17	24	117	90	36	27	10	24
R0633-01-0004	2.4	3	M20 x 2.5	250	1	50	52	49	17	30	117	90	36	27	12	30
R0633-01-0005	4	5	M24 x 3	400	2.6	72	81	59	25	36	163	125	44	37	14	36
R0633-01-0006	6.25	7.8	M30 x 3.5	500	5	87	94	81	30	48	204	148	62	46	17	46
R0633-01-0007	10	12.5	M36 x 4	1000	9.6	110	112	98	36	54	247	188	75	57	22	55
R0633-01-0008	12.5	15.6	M42 x 4.5	1500	10.9	110	101	108	36	63	247	188	83	57	24	65
R0633-01-0009	16	20	M48 x 5	2000	11.6	110	97	113	36	72	248	188	83	57	27	75
R0633-01-0010	18	22.5	M64 x 6	2200	16.3	123	111	126	36	100	274	202	91	64	32	95

Cod. Ranco	Cod. Yoke
R0633-01-0001	8-231-007
R0633-01-0002	8-231-010
R0633-01-0003	8-231-020
R0633-01-0004	8-231-030
R0633-01-0005	8-231-050

Cod. Ranco	Cod. Yoke
R0633-01-0006	8-231-078
R0633-01-0007	8-231-125
R0633-01-0008	8-231-156
R0633-01-0009	8-231-200
R0633-01-0010	8-231-225

## R0633

Anello a staffa orientabile  
Anchor point

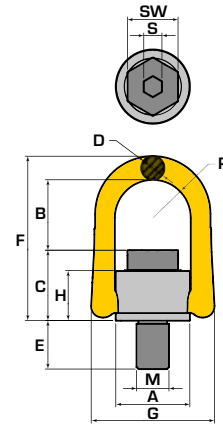

	Numero di gambe Number of legs	Direzione di Carico Load direction	Cod. 0633-01-	0001	0002	0003	0004	0005	0006	0007	0008	0009	0010
			Filett. Thread	M10	M12	M16	M20	M24	M30	M36	M42	M48	M64
	1	0°		0.7	1	2	3	5	7.8	12.5	15.6	20	22.5
	2	0°		1.4	2	4	6	10	15.6	25	31.2	40	45
	1	90°		0.7	1	2	3	5	7.8	12.5	15.6	20	22.5
	2	90°		1.4	2	4	6	10	15.6	25	31.2	40	45
	2	0 - 45°		1	1.4	2.8	4.2	7	10.9	17.5	21.8	28	31.5
	2	45° - 60°		0.7	1	2	3	5	7.8	12.5	15.6	20	22.5
	2	assimm. unsymm.		0.7	1	2	3	5	7.8	12.5	15.6	20	22.5
	3 - 4	0° - 45°		1.5	2.1	4.2	6.3	10.5	16.4	26.3	32.8	42	47.3
	3 - 4	45° - 60°		1.1	1.5	3	4.5	7.5	11.7	18.8	23.4	30	33.8
	3 - 4	assimm. unsymm.		0.7	1	2	3	5	7.8	12.5	15.6	20	22.5