

# R2091.44

- Bussola di guida con flangia (ISO9448-5/DIN9831)

- Flanged guide bush (ISO9448-5/DIN9831)




Materiale: 1.7131

Material: 1.7131

Trattamento termico: Cementazione + Tempra  
Heat treatment: Cementing + hardening

Durezza: HRC 61-63

Hardness: HRC 61-63

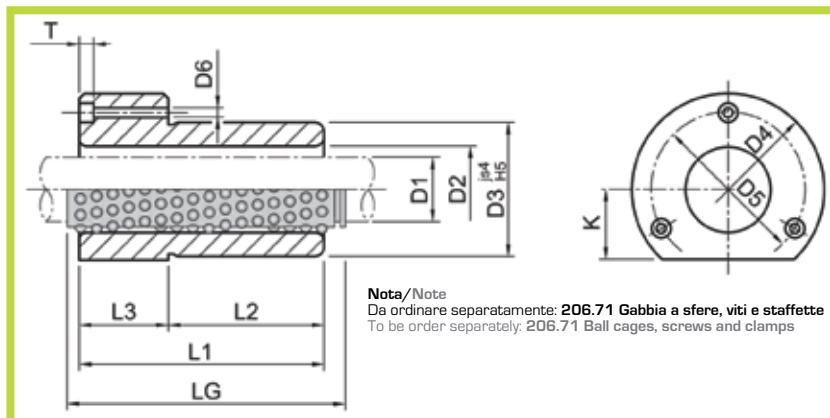

Esempio di ordinativo: Codice D1  
Example of purchasing order: Code D1

| D1      | D2      | D3  | D4  | D5  | D6  | K  | T   | L1  | L2 | L3 | LG  |
|---------|---------|-----|-----|-----|-----|----|-----|-----|----|----|-----|
| 19 - 20 | 25 - 26 | 32  | 50  | 40  | 4,5 | 18 | 4,6 | 52  | 37 | 15 | 71  |
| 24 - 25 | 30 - 31 | 40  | 63  | 50  | 5,5 | 23 | 5,7 | 62  | 37 | 25 | 71  |
| 30 - 32 | 38 - 40 | 40  | 72  | 58  | 5,5 | 28 | 5,7 | 72  | 47 | 25 | 80  |
| 38 - 40 | 46 - 48 | 58  | 85  | 70  | 6,6 | 33 | 6,8 | 77  | 47 | 30 | 95  |
| 48 - 50 | 56 - 58 | 70  | 104 | 86  | 9   | 38 | 9   | 102 | 60 | 42 | 120 |
| 60 - 63 | 68 - 71 | 85  | 120 | 100 | 9   | 46 | 9   | 102 | 60 | 42 | 120 |
| 80      | 92      | 105 | 148 | 125 | 11  | 56 | 11  | 125 | 75 | 50 | 140 |

# R2091.45

- Bussola di guida con flangia (ISO9448-5/DIN9831)

- Flanged guide bush (ISO9448-5/DIN9831)




Materiale: 1.7131

Material: 1.7131

Trattamento termico: Cementazione + Tempra  
Heat treatment: Cementing + hardening

Durezza: HRC 61-63

Hardness: HRC 61-63

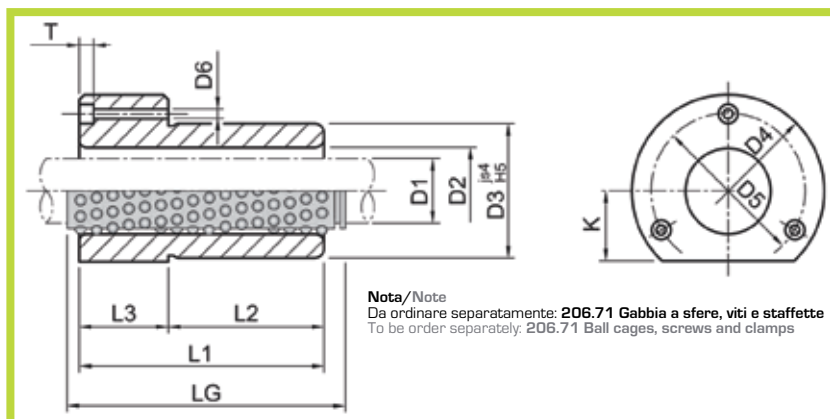

Esempio di ordinativo: Codice D1  
Example of purchasing order: Code D1

| D1      | D2      | D3 | D4  | D5  | D6  | K  | T   | L1  | L2 | L3 | LG |
|---------|---------|----|-----|-----|-----|----|-----|-----|----|----|----|
| 19 - 20 | 25 - 26 | 32 | 50  | 40  | 4,5 | 18 | 4,6 | 52  | 37 | 15 | 56 |
| 24 - 25 | 30 - 31 | 40 | 63  | 50  | 5,5 | 23 | 5,7 | 62  | 37 | 25 | 71 |
| 30 - 32 | 38 - 40 | 40 | 72  | 58  | 5,5 | 28 | 5,7 | 72  | 47 | 25 | 71 |
| 38 - 40 | 46 - 48 | 58 | 85  | 70  | 6,6 | 33 | 6,8 | 77  | 47 | 30 | 80 |
| 48 - 50 | 56 - 58 | 70 | 104 | 86  | 9   | 38 | 9   | 102 | 60 | 42 | 95 |
| 60 - 63 | 68 - 71 | 85 | 120 | 100 | 9   | 46 | 9   | 102 | 60 | 42 | 95 |