

P2379


- Piastra pre-rettificata
- Flat steel plate



Materiale: 1.2379
Material: 1.2379



Color symbol
Color symbol

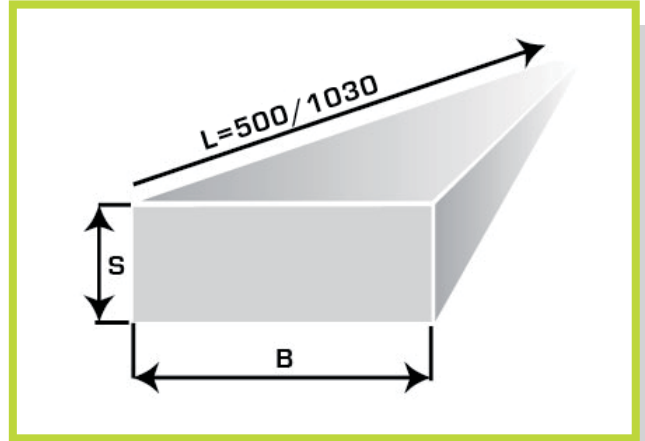

Esempio di ordinativo: Codice x S x B x L
Example of purchasing order: Code x S x B x L

Sezione Section		S																					
L500	L1030	2,40	3,40	4,40	5,40	6,40	8,40	10,40	12,40	15,40	16,40	20,40	25,40	30,40	32,40	40,40	50,40	60,40	63,40	70,40	80,40	100,40	
10,30	10,40	•	•	•	•	•	•																
15,30	15,40	•	•	•	•	•	•	•	•														
20,30	20,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25,30	25,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
30,30	30,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	32,40	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦
40,30	40,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
50,30	50,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
60,30	60,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	63,40	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦
B	70,40	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦
80,30	80,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	90,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
100,30	100,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
125,30	125,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
150,30	150,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	160,40	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦
	175,40	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦
200,30	200,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
250,30	250,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
300,30	300,40	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	350,40											◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦
	400,40											◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦	◦

Sezione Section	6,40	8,40	10,40	12,40	15,40	16,40	20,40	25,40	30,40	32,40	40,40	50,40	60,40	63,40	70,40	80,40	100,40	120,40	150,40
	•	•	•	•	•	◦	•	•	•	◦	•	•	◦	◦	◦	◦	◦	◦	◦

- solo L=1030
- L=1030 only

Note:
Tolleranze L500: S +0,2/-0 mm, B +0,25/-0 mm, L +5 mm
Per la sezione quadrata S e B +0,25 mm

Note:
Tolerances L500: S +0,2/-0 mm, B +0,2/-0 mm, L +5 mm
For square section S and B +0,25 mm

Note:
Tolleranze L1030: S +0,25/-0 mm, B +0,4/-0 mm, L +20 mm;
Per la sezione quadrata S e B +0,25 mm

Note:
Tolerances L1030: S +0,25/-0 mm, B +0,4/-0 mm, L +20 mm;
For square section S and B +0,25 mm